


TRIPLE RANGE PLATFORM SCALES

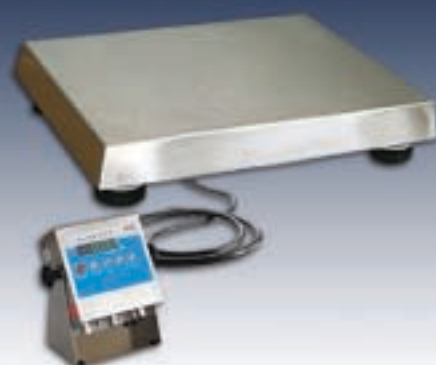

Scales designed for direct trading. They are manufactured in triple range version. Practically, the user receives three scales of different readabilities (switching between two ranges of measurements takes place automatically, with no user action).

Triple range scales are offered as one load cell and four load cells solutions.

One load cell scale is equipped with LED indicator installed on a pillar (or optionally the head can be installed on a 3 meter-long cable and possibility of hanging it on a wall).

In four load cells solution the indicator is installed on a three meter cable with possibility of hanging it on a wall.

Scales are powered from mains, RS 232 standard.



Counting pieces





Checkweighing



Summing function



2 years warranty period

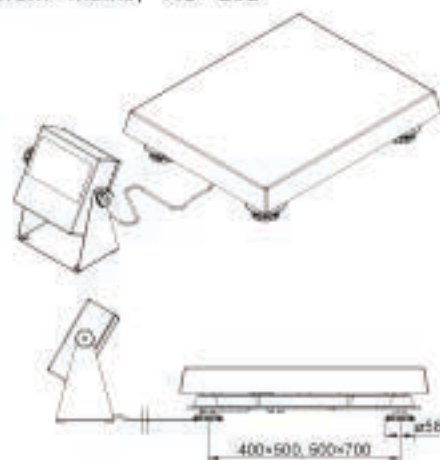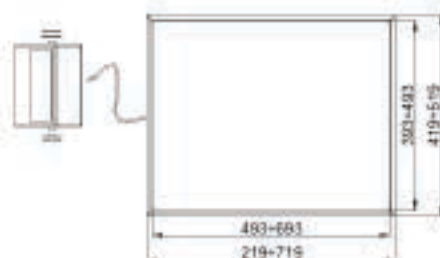

Technical data:

	WPT 15/30/60C2/K	WPT 30/60/150C2/K	WPT 15/30/60C3/K	WPT 30/60/150C3/K
Max capacity	15/30/60 kg	30/60/150 kg	15/30/60 kg	30/60/150 kg
Readability	5/10/20 g	10/20/50 g	5/10/20 g	10/20/50 g
Tare range	-60 kg	-150 kg	-60 kg	-150 kg
Pan size	400×500 mm	400×500 mm	500×700 mm	500×700 mm
Working temperature	-10° - +40 °C			
Output signal	RS 232			
IP rating	IP 65 construction, IP 66/67 indicator			
Power supply	230V AC, 50Hz			
Display	LED			

Additional equipment:

RACK FOR HEAD

LCD ADDITIONAL DISPLAY

LARGE SIZE ADDITIONAL DISPLAY

"KAFKA" THERMAL PRINTER

NEEDLE PRINTER "EPSON"

COMPUTER SOFTWARE: PW-WIN 2005

COMPUTER SOFTWARE: RAD-KEY 2000

COMPUTER SOFTWARE: REC-FS 2000

COMPUTER SOFTWARE: LS-FS 2000

RS 232/RS 485 CONVERTER

EXTERNAL POWER OUTPUT

DISTRIBUTOR: