


OVERHEAD TRACK SCALES

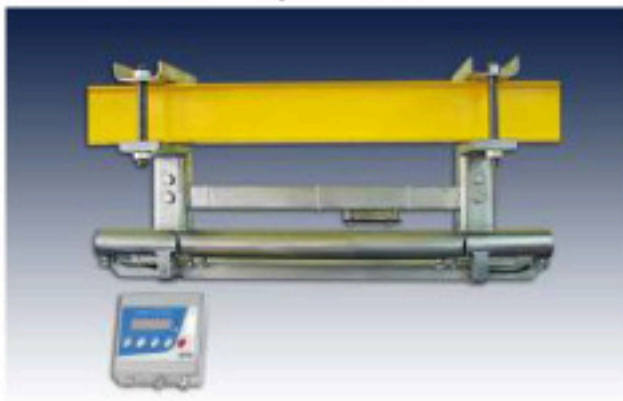

Designed for weighing loads which move on tracks of scales. Scale can cooperate with device for evaluating meat content. LCD backlit indicator installed on a wire.

Overhead scales are manufactured either in galvanized and in stainless steel version, as dual range weighing instruments. They are equipped with stainless steel backlit LCD measuring indicator PUE C/31H.

Special software allows for cooperation with a device for meat content evaluation.



Counting pieces






Checkweighing



Summing function



2 years warranty period

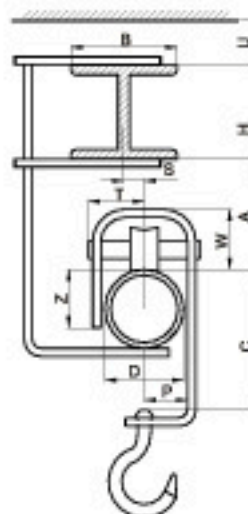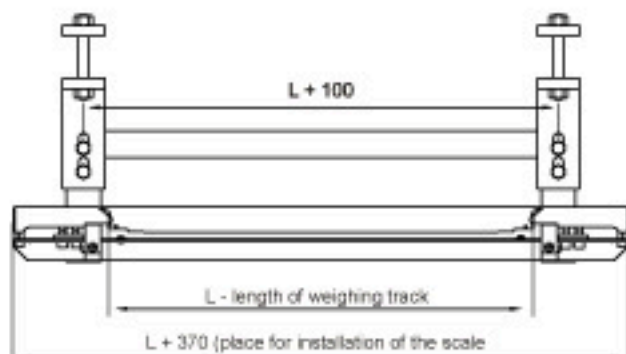

CAUTION!

- weighing track in place of installation of the scale must be positioned horizontally with maximal tolerance ± 10 mm
- z dimension can be omitted of: $Z \leq 80 \% D$

Technical data:

	WPT/2K 300/600	WPT/2K 300/600H
Max capacity	300/600 kg	300/600 kg
Readability	0,1/0,2 kg	0,1/0,2 kg
Tare range	-800 kg	-800 kg
Scale construction	galvanized	stainless steel
Track length		max. 800 mm
Working temperature		-10° - +40 °C
Output signal		RS 232
Power supply		230V, 50Hz
Display		LCD (backlit)

Additional equipment:

RACK FOR HEAD

LCD DISPLAY

LARGE SIZE LCD DISPLAY

"KAFKA" THERMAL PRINTER

NEEDLE PRINTER "EPSON"

COMPUTER SOFTWARE: PW-WIN 2005

COMPUTER SOFTWARE: RAD-KEY 2000

RS 232/RS 485 CONVERTER

EXTERNAL POWER OUTPUT

DISTRIBUTOR: